R1224DC16CB
Rack Mount CCTV Power Supply

Rev. DSR1224DC16CB - K10H

Overview

• These Altronix Rack Mount Power Supplies provide 12VDC or 24VDC distributed via sixteen (16) PTC protected Class 2 Rated outputs for power limited installation.

R1224DC16CB

• Sixteen (16) PTC protected outputs.
• Outputs are rated 2.5 amp.

Specifications

• 12VDC @ 4.5 amp per channel of 4 outputs or 24VDC @ 4.5 amp per channel of 4 outputs. (2 amp max. per individual output)
• Individual power LED indicators per channel.
• Power switch w/built-in circuit breaker.
• Filtered and electronically regulated outputs.
• Short circuit and thermal overload protection.
• Removable terminal blocks w/locking screw flange.
• 3U rack mount chassis for use in standard EIA 19” rack.
• Ease of installation saves time and eliminates costly labor.
• Product weight:
  - R1224DC16CB: 15.7 lbs.
• Shipping weight:
  - R1224DC16CB: 16.7 lbs.

Agency Approvals

Specialty Power Supply UL1012
CUL Listed - CSA Standard C22.2 No.107.1

Enclosure Dimensions

5.21”H x 19”W x 8.5”D

View from back

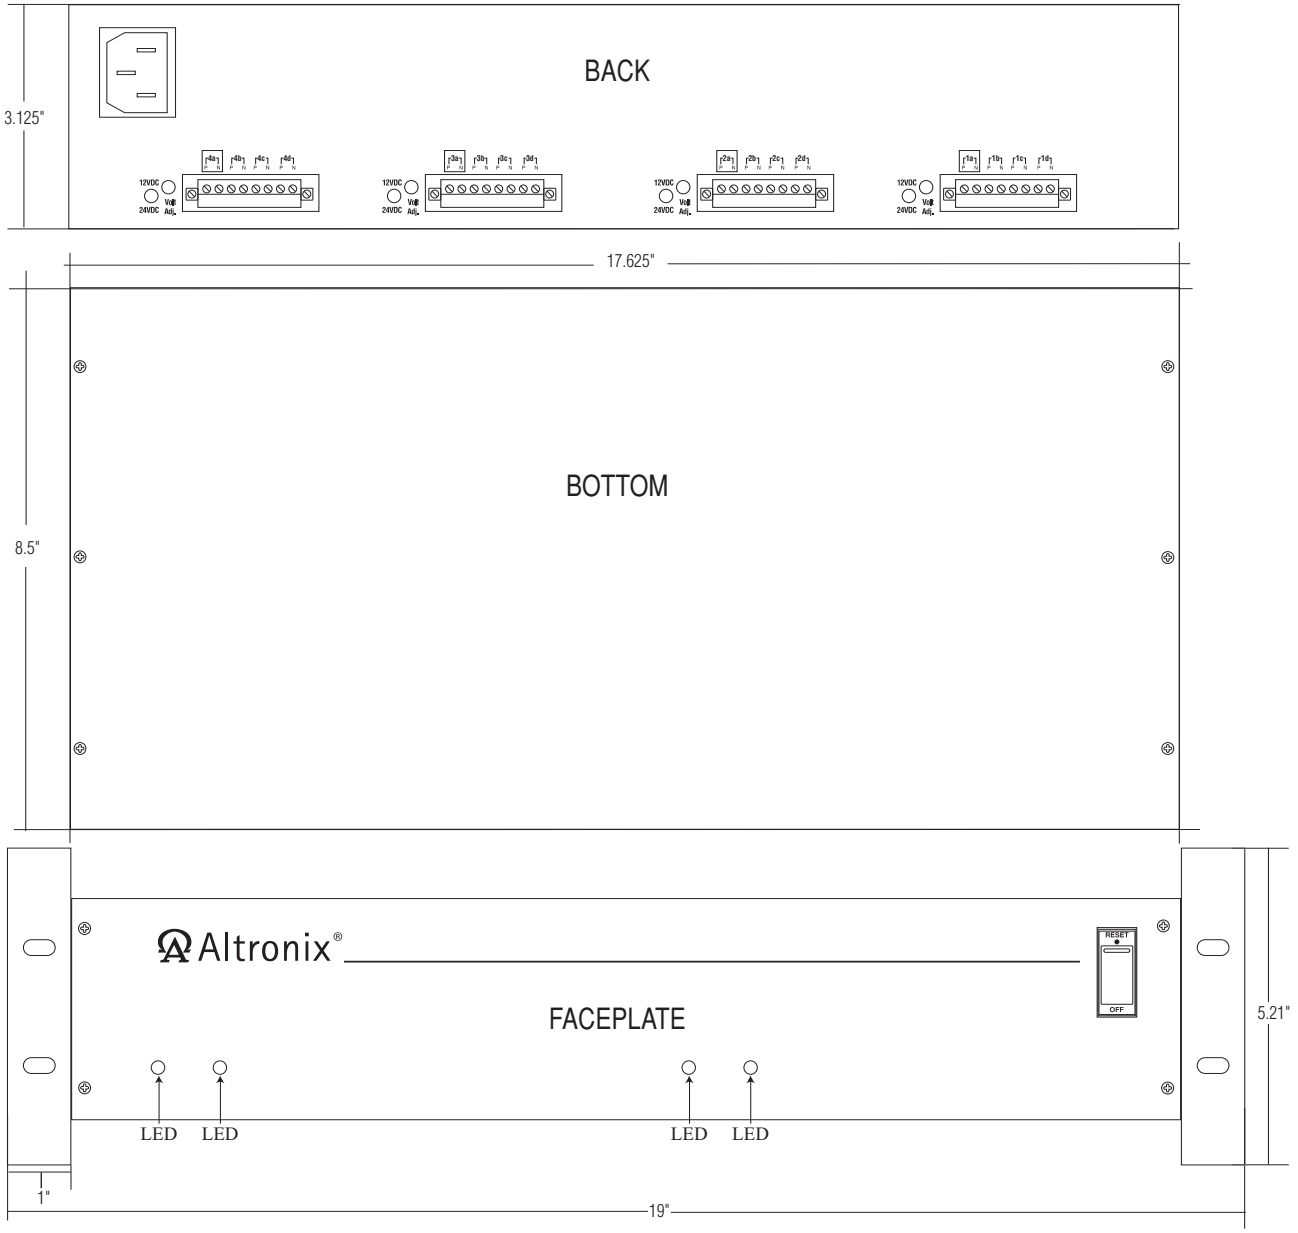

View from front